


VIDEO SPLITTER REFERENCE GUIDE

Thank you for purchasing this MANHATTAN® Video Splitter, Model 177207, 177214 or 177238.

Simply connect cables for a synchronously displayed signal on multiple monitors — from a single source! No software or hardware configuration is required.

*Shown: 8-port
Model 177238*

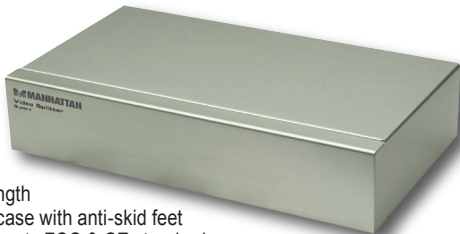

- Built-in booster for added signal strength
- Fully shielded metal case with anti-skid feet
- ISO 9002-certified; meets FCC & CE standards
- Gold-plated contacts
- Lifetime Warranty

- Avoid temperature extremes.
- Keep area well-ventilated.
- Do not allow liquids in or on the unit.

SPECIFICATIONS

- Power LED
- Computer-to-video splitter range: 7.5 m (25 ft.)
- Video splitter-to-monitor range: 50 m (165 ft.)
- Power: 9 V DC / 300 mA; cable, 1.6 m (5.5 ft.)
- Input connection: 1 HD15 male
- Output connections:
 - Model 177207: 2 HD15 female
 - Model 177214: 4 HD15 female
 - Model 177238: 8 HD15 female
- Signal support: VGA, SVGA, Multisync
- VGA bandwidth: 150 MHz
- VGA resolution: 1600 x 1280
- Min./max. input voltage: 0.5 V p-p / 1.0 V p-p
- I/O impedance: 75 Ohms
- Horizontal frequency: 30-120 kHz
- Vertical frequency: 40-120 kHz
- Dimensions:
 - Models 177207/177214: 54 x 208 x 104 mm (2.1 x 8.2 x 4 in.); 700 g (24.7 oz.)
 - Model 177238: 63 x 302 x 128.5 mm (2.5 x 11.9 x 5 in.); 1.3 kg (45.9 oz.)
- Housing: metal


MANHATTAN

BRINGING COMPUTERS TO LIFE

MANHATTAN® offers a complete line of PC Components, Peripherals, Cables and Accessories. Ask your local computer dealer for more information or visit us online at

www.manhattan-products.com

Copyright © MANHATTAN

All products mentioned are trademarks or registered trademarks of their respective owners.

MH-177207/177214/177238-miniQIG-0808-01