




MODELO	EPRO-TLJACK6-BL
DESCRIPCION	JACK KEYSTONE ENSON EPRO-TLJACK6-BL CAT6 VERTICAL SIN PINZAS AZUL

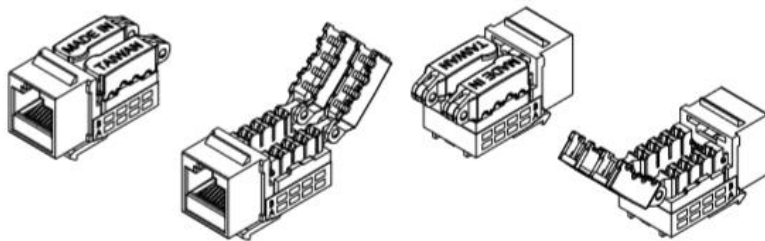

#### Performance:

Meets C6 EIA/TIA 568B Standard.

#### Materials:

Body : Fireproof ABS UL-94V0  
 Jack : 8P8C 50 micro inches gold plated  
 PCB : FR-4 / UL-94V0  
 IDC Cap : Fireproof PC+Glass Fiber UL-94V2  
 IDC Body : Fireproof ABS UL-94V0  
 IDC Pin : Phosphor Bronze & Tinned

IDC Description : For 22-26 AWG.  
 For 110 or Krone punch-down Tool  
 Toolless (when use IDC cap directly)

#### Electrical Specifications:

Insulation Resistance : 500M ohms (min.)  
 Contact Resistance : 20m ohms (max.)  
 Current Rating : 1.5 Amps .  
 DC Resistance : 0.1 ohms (max.)  
 Withstanding Voltage : 1000 VAC RMS @ 60Hz / 1 min.

#### Mechanical Specifications:

IDC Punch Down Cycle : Over 250 Cycles (min.)  
 Jack Insertion Cycle : Over 2000 Cycles (min.)

Operation Temperature : -40 °C ~ +70 °C