

## Key Feature

- H.264+/H.264 video compression
- HDTVI/AHD/CVI/CVBS/IP video input
- Audio via coaxial cable
- Up to 5-ch IP camera input for (up to 1080p)
- Max. 1200 m for 720p HDTVI signal



## Compression and Recording

- H.264 + video compression improves encoding efficiency and reduces data storage costs
- Support 1080p lite of all channels. When 1080p lite is on, the image effect is similar with 1080p

## Storage and Playback

- One SATA interface (up to 6 TB capacity per HDD)
- Smart search for efficient playback


## Network & Ethernet Access

- Hik-Connect & DDNS (Dynamic Domain Name System) for easy network management
- 64 Mbps total bandwidth

<b>Model</b>	<b>S04-TURBO-G2/A</b>
<b>Recording</b>	
<b>Video compression</b>	H.264+/H.264
<b>Encoding resolution</b>	When 1080p Lite mode not enabled: 720p/WD1/4CIF/VGA/CIF When 1080p Lite mode enabled: 1080p lite/720p/WD1/4CIF/VGA/CIF
<b>Frame rate</b>	Main stream: When 1080p Lite mode not enabled: For 720p stream access: 720p/WD1/4CIF/VGA/CIF@25fps (P)/30fps (N) When 1080p Lite mode enabled: 1080p lite/720p/WD1/4CIF/VGA/CIF@25fps (P)/30fps (N)
	Sub-stream: 2CIF@6fps; CIF/QVGA/QCIF@ 25fps (P)/30fps (N)
<b>Video bit rate</b>	32 Kbps to 4 Mbps
<b>Dual stream</b>	Support
<b>Stream type</b>	Video, Video & Audio
<b>Audio compression</b>	G.711u
<b>Audio bit rate</b>	64 Kbps
<b>Video and Audio</b>	
<b>IP video input</b>	1-ch (up to 5-ch)
	Up to 1080p resolution
	Support H.264+/H.264 IP cameras
<b>Analog video input</b>	4-ch
	BNC interface (1.0 Vp-p, 75 Ω), supporting coaxitron connection
<b>Turbo HD input</b>	1080p25, 1080p30, 720p25, 720p30
<b>AHD input</b>	1080p25, 1080p30, 720p25, 720p30
<b>HDCVI input</b>	1080p25, 1080p30, 720p25, 720p30
<b>CVBS input</b>	Support
<b>HDMI/VGA output</b>	1-ch, 1920 × 1080/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz
<b>Audio input</b>	1-ch RCA (2.0 Vp-p, 1 KΩ), and 4-ch via coaxial cable
<b>Audio output</b>	1-ch, RCA (Linear, 1 KΩ)
<b>Two-way audio</b>	Reuse the first audio input
<b>Synchronous playback</b>	4-ch
<b>Network</b>	
<b>Remote connection</b>	32
<b>Network protocol</b>	TCP/IP, PPPoE, DHCP, Hik-Connect, DNS, DDNS, NTP, SADP, SMTP, NFS, iSCSI, UPnP™, HTTPS, ONVIF
<b>Network interface</b>	1, RJ45 10M/100M self-adaptive Ethernet interface
<b>Auxiliary interface</b>	
<b>SATA</b>	1 SATA interface
<b>Capacity</b>	Up to 6 TB capacity for each disk
<b>Alarm in/out</b>	N/A
<b>USB interface</b>	Rear panel: 2 × USB 2.0
<b>General</b>	
<b>Power supply</b>	12 VDC, 1.5 A

Consumption (without HDD)	≤ 8 W
Working temperature	-10 °C to 55 °C (14 °F to 131 °F)
Working humidity	10% to 90%
Dimension (W × D × H)	200 × 200 × 45 mm (7.9 × 7.9 × 1.8 inch)
Weight (without HDD)	≤ 0.8 kg (1.8 lb)

## Physical Interface

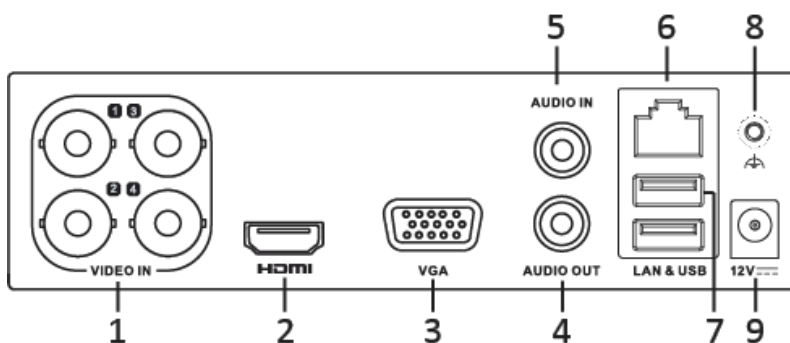

No.	Description	No.	Description
1	Video and Audio in	6	LAN Network Interface
2	HDMI Interface	7	USB Interfaces
3	VGA Interface	8	GND
4	AUDIO OUT, RCA Connector	9	12 VDC Power Input
5	AUDIO IN, RCA Connector		