**S**
SERIES


NR9681-v2

H.265 2U 64-CH NVR

H.265 • VAST 2 Inside • 64 Channel • 8x HDD • ONVIF • Dual LAN • Fisheye
Dewarp • Local Display • RAID • Redundant Power

- H.265/H.264 Compression Technology
- 64-CH Recording, 64-CH Display
- 8 Hot-Swappable HDD Bays
- Support RAID 0/1/5/6/10 Storage
- Redundant Power
- Dual Lan Giga Network Ports
- Multiple Fisheye Dewarp Support
- VIVOTEK VAST 2 Inside
- Smart Search II: People/Vehicle Search
- Analytics Integration: Smart VCA, Parking Violation/Restricted Zone Detection
- Cybersecurity Management Solution
- Comprehensive VIVOTEK Solution Support



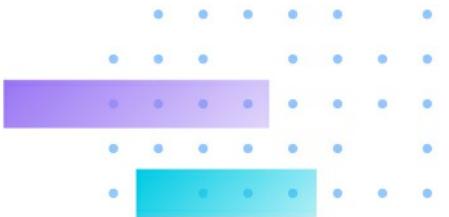

Technical Specifications

Device

Model	NR9681-v2
OS	Embedded Windows 10
Watchdog	Hardware + Software
Power Restoration	System Restart Automatically after Power Recovery

Display

LiveView Display	64 Channels Equal: 1x1, 2x2, 3x3, 4x4, 5x5, 6x6, 7x7, 8x8 Panorama: 1P+6, 2P, 2P+3, 3P Focus: 1+12, 1+16, 1+3, 1+5, 1+7, 1+9, 2+8 Vertical: 1V+6, 2V+2, 2V+3, 3V, 3V+4, 4V, 4V+4, 5V Single layout display, full screen display, custom layout, layout rotation
Video Output	HDMI x1, Display Port x1
Display Resolution	HDMI: 4096x2160 DP: 4096x2304
Dual Monitor	Supported
Camera Position	Change the viewcell position on the Live View screens
Stream Application	Stream Selection & Auto Stream Size
Monitor Enhancement	E-Map Embedded, Drag & Drop, Remote I/O Control, PiP (Digital Zoom), Instant Playback, Video Display Mode (Aspect Ratio & Camera Information), Metadata Display (VCA, POS and Data Magnet)
Fisheye Dewarp	1O, 1P, 1R, 1O3R, 4R, 2P, 4R Pro, 108R and Fisheye Auto-Pan
PTZ/ePTZ Operation	Direction Control, Home, Zoom, Focus, Isis, Preset, Patrol (Group), Tracking, Pan, Stop, Speed, Wiper Blade Control

Video

Video Format	MJPEG, MPEG4, H.264 AVC, H.264 SVC, H.265
Graphic Decoder	Software decoding
Decoding Resolution	Up to 8192x8192
Decoding Capability	H.264: 1920x1080 @ 540 fps H.265: 1920x1080 @ 270 fps

Audio

Audio Format	G.711, G.726, AMR, AAC
Audio In/Out	Microphone audio jack Input x1 3.5 Line input audio jack x1 3.5 Line output audio jack x1
2-way Audio	Supported

Record


Recording Time (sec.)	Pre-Record: 3-15 Post-Record: 10-60
Recording Stream	Single
Recording Throughput	512 Mbps
Recording Mode	Continuous, Event, Customized Schedule, Activity Adaptive Streaming
Recording Setting	Recycling time depends on the remaining storage space or the set number of days
Watermark	Supported
Seamless Recording	Supported

Storage & Backup


HDD Devices	Hot-Swappable Tray x8 *HDD is purchased by separately.
HDD Max. Capacity	*Please refer to recommended HDD list on the VIVOTEK website.
RAID	RAID 0, 1, 5, 6, 10
Disk Management	Create, format and remove disk
Video Clip Export	USB Dongle (FAT Format) NAS (SMB & CIFS)




Schedule Backup	NAS (SMB & CIFS)
Playback	
Playback Display	64 Channels (the max. number of monitors supported depends on the decoding capability of your system) Equal: 1x1, 2x2, 3x3, 4x4, 5x5, 6x6, 7x7, 8x8 Panorama: 1P+6, 2P, 2P+3, 3P Focus: 1+12, 1+16, 1+3, 1+5, 1+7, 1+9, 2+8 Vertical: 1V+6, 2V+2, 2V+3, 3V, 3V+4, 4V, 4V+4, 5V Single layout display, full screen display, custom layout, layout rotation
Playback Control	Play, rewind, pause, stop, next/previous video start, next/previous frame, 1/8X ~ 64X speed control, bookmark
Video Search	Calendar, Event, Alarm, Bookmark, Thumbnail, Smart Search II, Transaction (POS), Data Magnet, Log
Snapshot	BMP & JPEG
Video Clip Export	3GP & EXE
Network	
Ethernet	10/100/1000Mbps Ethernet (RJ-45) x2
Video Throughput for Remote Client	400 Mbps
Protocols	IPv4, TCP/IP, HTTP, HTTPS, UPnP, RTSP/RTP/RTCP, SMTP, FTP, DHCP, NTP, DNS, DDNS, IP Filter
Alarm Management	
Alarm Period (sec.)	Max. 30
Alarm Filter	Time, Trigger Type (Camera/Substation/System), Status, Name, Trigger Source
Alarm Setting	Realtime System Notification Alarm Result Display by List or Thumbnail
Schedule Type	Continuous, schedule, manual
Camera Event	General: Motion detection, Camera DI, Camera DO, IR (Infrared), PIR (Passive infrared), Tampering detection, Temperature, Camera disconnected, Recording error, Stop recording, Video loss (Video server only), SD card life expectancy detection, Audio detection, Shock detection Smart VCA: Line crossing detection, Intrusion detection, Loitering detection, Face detection, Missing object detection, Unattended object detection, Crowd detection, Running Detection Trend Micro IoT Security: Brute force attack, Cyberattack, Quarantine event
Substation	NV Series NVR: Abnormal G-sensor Motion, Speeding, GPS Disconnected ND Series NVR: Fan Status, Network Disconnected, Storage Failure, Storage Full, Number of remaining people, Brute force attack, Cyberattack, Quarantine event NR Series NVR: Network Disconnected, Storage Failure, Storage Full
External Devices Event	DI/O (with I/O Box), TCP Message
Action	Start to record videos, Set DO status, Go to camera presets, Send HTTP requests, Send live streaming, Send email with snapshot of assigned camera(s), Go to E-Map, Sound the alarm and Add bookmark
Alarm State for Management	New, In Progress, False Alarm and Close
Alarm Result Export	.csv File
eMap	
Source	Import picture & folder
Device	Camera, external DI/O
Marked	Add, remove, direction control, PTZ control, FOV control, live view & playback
Event Notification	One or More Live Streaming
External Interface	
USB	USB 3.0 Type- A x3 USB 3.0 Type-C X1
Audio	Microphone audio jack Input x1 3.5 Line input audio jack x1 3.5 Line output audio jack x1
System	
POS Integration	Supported

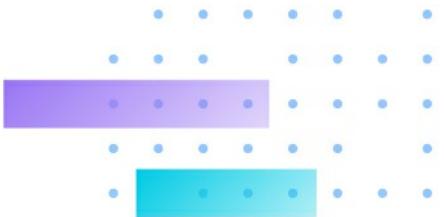

UPS Integration	Supported
Camera Integration	ONVIF Profile S
I/O Box Integration	Advantech ADAM-6000 Series CHIYU CYT-133SC MOXA ioLogik E1210, E1211 and E1212
User Management	Authentication: Basic Account / Windows AD Account User Account: 1024 User Level: Administrator / Customized User
Log	Operation, system and event log
Date & Time	Sync server
Advanced Features	
VCA Counting Solution	Supported
LPR Solution	Supported
VCA Event Search	Smart VCA
Smart Search	Smart Search I & Smart Search II
Cybersecurity Management	Supported
Failover	Supported
Remote Client	
Software AP	Shepherd, VAST 2
Mobile/Tablet App	iViewer (iOS/Android)
General	
Power Input	Redundant power 100~220V AC
Power Consumption	Max. 650 W
Redundant Power	Supported
80 Plus Certified	Platinum
Dimensions	89 (H) x 437 (W) x 647 (D) mm
Weight	15.8 kg (without HDD)
Operating Temperature	5°C ~ 35°C (41°F ~ 95°F)
Humidity	0 ~ 95%
Safety Certifications	CE, FCC, VCCI, C-Tick, UL, CB
Warranty	36 months

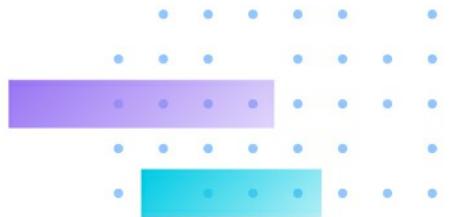

Dimensions

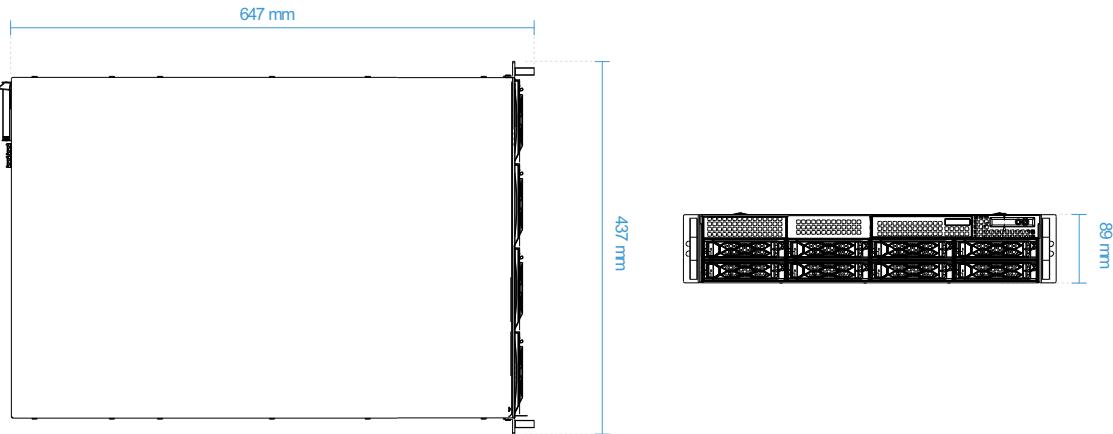

VIVOTEK

All specifications are subject to change without notice. Copyright©VIVOTEK INC. All rights reserved. Ver. 3