Viewsonic PA700W video proyector Proyector de alcance estándar 4500 lúmenes ANSI WXGA (1280x800) Blanco
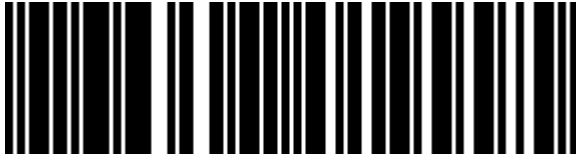
Marca : Viewsonic **Código del producto:** PA700W

Nombre del producto : PA700W

Viewsonic PA700W. Brillo de proyector: 4500 lúmenes ANSI, Resolución original del proyector: WXGA (1280x800), Razón de contraste (típica): 12500:1. Tipo de fuente de luz: Lámpara, Vida útil de la fuente de luz: 4000 h, Vida útil de la fuente de luz (modo económico): 12000 h. Enfoque: Manual, Intervalo de longitud focal: 21.85 - 24 mm, Rango de apertura: 2.41 - 2.53. Señal analógica: NTSC, PAL, SECAM, Formatos gráficos soportados: 640 x 480 (VGA), 1920 x 1080 (HD 1080), Formato de vídeo soportado: 480i, 480p, 576i, 576p, 720p, 1080i, 1080p. Tipo de serie de interfaz: RS-232, Tipo de conector HDMI: De tamaño completo, Tipo de puerto de servicio: USB tipo A

Projector

Smart projector *	✗
Screen size compatibility *	762 - 7620 mm (30 - 300")
Projection distance	1 - 11.11 m
Projector brightness *	4500 ANSI lumens
Projector native resolution *	WXGA (1280x800)
Contrast ratio (typical) *	12500:1
Number of colours	1.07 billion colours
Horizontal scan range	15 - 102 kHz
Vertical scan range	23 - 120 Hz
Keystone correction, vertical	-40 - 40°

Light source

Light source type *	Lamp
Service life of light source *	4000 h
Service life of light source (economic mode)	12000 h
Lamp type	UHP
Lamp power	240 W
Lamps quantity	1 lamp(s)

Lens system

Focus *	Manual
Focal length range	21.85 - 24 mm
Aperture range (F-F)	2.41 - 2.53
Zoom capability	✔
Digital zoom	2x
Optical zoom	1.1x
Throw ratio	1.544 - 1.72
Offset	112.4%

Video

Analog signal format system *	NTSC, PAL, SECAM
Full HD *	✔
3D *	✗
Supported graphics resolutions	640 x 480 (VGA), 1920 x 1080 (HD 1080)
Supported video modes	480i, 480p, 576i, 576p, 720p, 1080i, 1080p

Ports & interfaces

HDMI connector type	Full-size
HDMI version	1.4
Service port type	USB Type-A

Network

Wi-Fi *	✗

Storage

Card reader integrated *	✗

Features

Interactive *	✗
Noise level (economic mode)	25 dB
HDCP	✔
On Screen Display (OSD)	✔
On Screen Display (OSD) languages	Arabic, Simplified Chinese, Traditional Chinese, Czech, German, Dutch, English, Spanish, Finnish, French, Greek, Hungarian, Indonesian, Italian, Korean, Polish, Portuguese, Russian, Thai, Turkish, Vietnamese
Number of OSD languages	22
HDCP version	1.4
Noise level *	34 dB
Air filter	✔

Multimedia

Built-in speaker(s) *	✔
RMS rated power	3 W
Number of built-in speakers	1

Design

Market positioning *	Education
Product type *	Standard throw projector
Product colour *	White
LED indicators	✔
Cable lock slot	✔
Cable lock slot type	Kensington

Display

Built-in display *	✗

Power

Power source *	AC
Power consumption (typical) *	295 W
Power consumption (standby) *	0.5 W
AC input voltage	100 - 240 V
AC input frequency	50 - 60 Hz

Ports & interfaces

USB 2.0 ports quantity	1
Serial interface type *	RS-232
PC Audio in	✔
PC Audio out	✔
PC in (D-Sub)	✔
VGA (D-Sub) ports quantity *	2
HDMI ports quantity *	2
DVI port *	✘
AC (power) in	✔

Network

Smart TV *	✘
Ethernet LAN *	✘

Operational conditions

Operating temperature (T-T)	0 - 40 °C

Weight & dimensions

Width	309 mm
Depth	234 mm
Height	115 mm
Weight *	2.7 kg
Package width	400 mm
Package depth	337 mm
Package height	168 mm
Package weight	3.8 kg

Packaging content

Remote control included *	✔
Remote control type	IR
Cables included	AC, VGA
Quick start guide	✔
Warranty card	✔

Technical details

Image lag time	33.2 ms

0766907019995

766907019995