

## TP-Link AC750 router inalámbrico Ethernet rápido Doble banda (2,4 GHz / 5 GHz) Negro, Blanco

Marca : TP-Link

Código del producto: ARCHER C20

Nombre del producto : AC750

Router Inalámbrico de Doble Banda, 4x 10/100Mbps, USB 2.0, 2.4-5GHz, 433Mbps

TP-Link AC750. Tipo de conexión WAN: RJ-45. Banda Wi-Fi: Doble banda (2,4 GHz / 5 GHz), Máximo estándar Wi-Fi: Wi-Fi 5 (802.11ac), Tasa de transferencia de datos WLAN (máx.): 433 Mbit/s. Tipo de interfaz Ethernet LAN: Ethernet rápido, Ethernet LAN, velocidad de transferencia de datos: 10,100 Mbit/s, Tecnología de cableado: 10/100Base-T(X). Algoritmos de seguridad: WEP, WPA, WPA-Enterprise, WPA2, WPA2-Enterprise, Seguridad con cortafuegos: SPI. Protocolos de red compatibles: IPv4, IPv6




WAN connection		Protocols	
Ethernet WAN *	✓	Universal Plug and Play (UPnP)	✓
DSL WAN *	✗	Supported network protocols	IPv4, IPv6
SIM card slot *	✗	Design	
3G/4G USB modem compatibility *	✗	Product colour	Black, White
WAN connection type	RJ-45	LED indicators	✓
Wireless LAN features		On/off switch	✓
Wi-Fi band *	Dual-band (2.4 GHz / 5 GHz)	Product type *	Tabletop router
Top Wi-Fi standard *	Wi-Fi 5 (802.11ac)	Certificates	
WLAN data transfer rate (max) *	433 Mbit/s	Compliance certificates	RoHS, Federal Communications Commission (FCC), CE
Wi-Fi standards	802.11a, Wi-Fi 5 (802.11ac), 802.11b, 802.11g, Wi-Fi 4 (802.11n)	Packaging content	
WLAN data transfer rate (first band)	300 Mbit/s	Cables included	LAN (RJ-45)
WLAN data transfer rate (second band)	433 Mbit/s	AC adapter included	✓
Network		Quick installation guide	✓
Ethernet LAN *	✓	Sustainability	
Ethernet LAN interface type *	Fast Ethernet	Sustainability compliance	✓
Ethernet LAN data rates	10,100 Mbit/s	Antenna	
Cabling technology	10/100Base-T(X)	Antenna design *	External
Networking standards	IEEE 802.11a, IEEE 802.11ac, IEEE 802.11b, IEEE 802.11g, IEEE 802.11n	Antennas quantity	3
Dynamic DNS (DDNS)	✓	Transmit power	23 dBmW
Number of guest networks (2.4 GHz)	1	Features	
Number of guest networks (5 GHz)	1	Built-in processor	✓
VPN Passthrough	✓	Processor cores	1
VPN support	PPTP, L2TP, IPSec	Power	
Ports & interfaces		Power source type *	DC
Ethernet LAN (RJ-45) ports *	4	Output voltage	9 V
USB port *	✗	Output current	0.6 A
DC-in jack	✓	Operational conditions	
		Operating temperature (T-T)	0 - 40 °C
		Storage temperature (T-T)	-40 - 70 °C

<b>Management features</b>		<b>Operational conditions</b>			
Web-based management	✓	Operating relative humidity (H-H)	10 - 90%		
Quality of Service (QoS) support	✓	Storage relative humidity (H-H)	5 - 90%		
<b>System requirements</b>					
Reset button	✓	Windows 7 Enterprise, Windows 7 Enterprise x64, Windows 7 Home Basic, Windows 7 Home Basic x64, Windows 7 Home Premium, Windows 7 Home Premium x64, Windows 7 Professional, Windows 7 Professional x64, Windows 7 Starter, Windows 7 Starter x64, Windows 7 Ultimate, Windows 7 Ultimate x64, Windows 8, Windows 8 Enterprise, Windows 8 Enterprise x64, Windows 8 Pro, Windows 8 Pro x64, Windows 8 x64, Windows 8.1, Windows 8.1 Enterprise, Windows 8.1 Enterprise x64, Windows 8.1 Pro, Windows 8.1 Pro x64, Windows 8.1 x64, Windows Vista Business, Windows Vista Business x64, Windows Vista Enterprise, Windows Vista Enterprise x64, Windows Vista Home Basic, Windows Vista Home Basic x64, Windows Vista Home Premium, Windows Vista Home Premium x64, Windows Vista Ultimate, Windows Vista Ultimate x64, Windows XP Home, Windows XP Home x64, Windows XP Professional, Windows XP Professional x64			
WPS push button	✓	Windows operating systems supported			
<b>Security</b>		Linux operating systems supported			
Security algorithms	WEP, WPA, WPA-Enterprise, WPA2, WPA2-Enterprise	✓			
Firewall	✓	Mac operating systems supported			
Firewall security	SPI	✓			
Guest access	✓				
Port-based Network Access Control (PNAC)	✓				
Stateful Packet Inspection (SPI)	✓				
DoS attack prevention	✓				
Filtering	✓				
MAC address filtering	✓				
IP address filtering	✓				
DMZ support	✓				
<b>Weight &amp; dimensions</b>					
Width	230 mm				
Depth	144 mm				
Height	35 mm				
<b>Packaging data</b>					
Package width	357 mm				
Package depth	223 mm				
Package height	68 mm				
Package weight	670 g				
Number of products included	1 pc(s)				
<b>Other features</b>					
WLAN data transfer rates supported 300,433 Mbit/s					




6935364091606

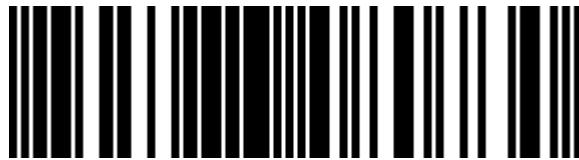

0845973080730



845973080730

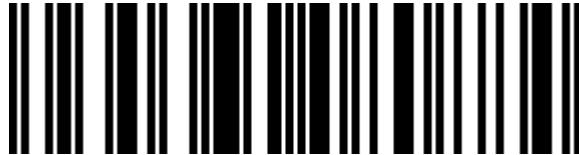

6935364080884



6935364080730

Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.