Viewsonic LS740HD video proyector Proyector de alcance estándar 5000 lúmenes ANSI 3LCD 1080p (1920x1080) Blanco

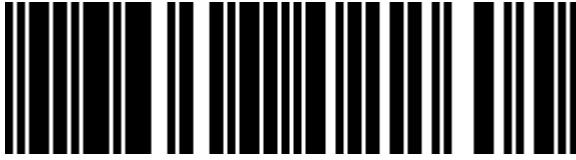**Marca :** Viewsonic

Código del producto: LS740HD

Nombre del producto : LS740HD

Viewsonic LS740HD. Brillo de proyector: 5000 lúmenes ANSI, Tecnología de proyección: 3LCD, Resolución original del proyector: 1080p (1920x1080). Tipo de fuente de luz: Laser, Vida útil de la fuente de luz: 20000 h, Vida útil de la fuente de luz (modo económico): 30000 h. Enfoque: Manual, Distancia focal fija: 7.51 mm, Tipo de zoom: Manual. Señal analógica: NTSC, PAL, SECAM, Formato de vídeo soportado: 480i, 480p, 576i, 576p, 720p, 1080i, 1080p, 2160p. Tipo de serie de interfaz: RS-232, Tipo de conector HDMI: De tamaño completo, Tipo de puerto de servicio: USB tipo A

Projector

Smart projector *	✘
Screen size compatibility *	1016 - 7620 mm (40 - 300")
Projection distance	0.43 - 3.25 m
Projector brightness *	5000 ANSI lumens
Projection technology *	3LCD
Projector native resolution *	1080p (1920x1080)
Contrast ratio (typical) *	3000000:1
Native aspect ratio *	16:9
Number of colours	1.07 billion colours
Horizontal scan range	15 - 102 kHz
Vertical scan range	23 - 120 Hz
Keystone correction, horizontal	-15 - 15°
Keystone correction, vertical	-15 - 15°

Light source

Light source type *	Laser
Service life of light source *	20000 h
Service life of light source (economic mode)	30000 h

Lens system

Focus *	Manual
Fixed focal length	7.51 mm
F-number (relative aperture)	2.8
Zoom capability	✔
Zoom type	Manual
Digital zoom	2x
Throw ratio	0.49
Offset	132%

Video

Analog signal format system *	NTSC, PAL, SECAM
Full HD *	✔
3D *	✘
Supported video modes	480i, 480p, 576i, 576p, 720p, 1080i, 1080p, 2160p

Ports & interfaces

HDMI connector type	Full-size
HDMI version	2.0

Network

Wi-Fi *	✘

Storage

Card reader integrated *	✘

Features

Interactive *	✘
Noise level (economic mode)	29 dB
HDCP	✔
On Screen Display (OSD)	✔
On Screen Display (OSD) languages	Danish, German, Hungarian, Arabic, Dutch, Norwegian, English, Indonesian, Swedish, Spanish, Italian, Polish, Thai, Japanese, Portuguese, Turkish, Romanian, Simplified Chinese, Finnish, Korean, Russian, Vietnamese, Traditional Chinese, French, Greek, Czech, Slovak
Number of OSD languages	27
HDCP version	1.4/2.2
Noise level *	32 dB

Multimedia

Built-in speaker(s) *	✔
RMS rated power	30 W
Number of built-in speakers	2

Design

Market positioning *	Business
Product type *	Standard throw projector
Product colour *	White
Cable lock slot	✔
Cable lock slot type	Kensington

Display

Built-in display *	✘

Power

Power source *	AC
Power consumption (typical) *	245 W
Power consumption (standby) *	0.5 W

Ports & interfaces

Service port type	USB Type-A
USB 2.0 ports quantity	1
USB 2.0 Type-A ports quantity	1
Serial interface type *	RS-232
PC Audio out	✔
HDMI ports quantity *	2
DVI port *	✘
AC (power) in	✔

Network

Smart TV *	✘
Ethernet LAN *	✔
Ethernet LAN (RJ-45) ports	1

Power

AC input voltage	100 - 240 V
AC input frequency	50 - 60 Hz

Operational conditions

Operating temperature (T-T)	0 - 40 °C

Weight & dimensions

Width	337 mm
Depth	265 mm
Height	131.5 mm
Weight *	4.5 kg
Package width	496 mm
Package depth	195 mm
Package height	387 mm
Package weight	6.6 kg

Packaging content

Remote control included *	✔
Quick start guide	✔
Warranty card	✔

Technical details

Image lag time	49.9 ms

Logistics data

Quantity per pack	1 pc(s)

0766907022605

766907022605