



DELL PowerEdge R760XS servidor 2 TB Bastidor (2U) Intel® Xeon Silver 4514Y 2 GHz 16 GB DDR5-SDRAM 1400 W

Marca : DELL

Familia de productos:
PowerEdge

Código del producto: R760XS-
FY26Q1-MX



Nombre del producto :
R760XS

- No OS
- Intel Xeon Silver 4514Y (30MB Cache, 2GHz)
- 16GB DDR5-SDRAM & 2000GB HDD
- iDRAC9 Enterprise 15G

Intel Xeon Silver 4514Y (30MB Cache, 2GHz), 16GB DDR5-SDRAM, 2000GB HDD, LAN (Broadcom 5720), PERC H755 with front load bracket, iDRAC9 Enterprise 15G, 2 x 1400W, No OS

DELL PowerEdge R760XS servidor 2 TB Bastidor (2U) Intel® Xeon Silver 4514Y 2 GHz 16 GB DDR5-SDRAM 1400 W:




La combinación perfecta de cumplimiento y densidad

Ejecute las aplicaciones de TI más populares con facilidad gracias a la computación equilibrada y el almacenamiento flexible de este servidor refrigerado por aire.

DELL PowerEdge R760XS. Familia de procesador: Intel® Xeon Silver, Frecuencia del procesador: 2 GHz, Modelo del procesador: 4514Y. Memoria interna: 16 GB, Tipo de memoria interna: DDR5-SDRAM. Capacidad total de almacenaje: 2 TB, Tamaño del HDD: 3.5", Interfaz del HDD: SATA III. Ethernet, Tecnología de cableado: 10/100/1000Base-T(X). Fuente de alimentación: 1400 W, Suministro de energía redundante (RPS), soporte. Tipo de chasis: Bastidor (2U)

Processor		Expansion slots	
Processor manufacturer *	Intel	PCI Express x8 slots	1
Processor family *	Intel Xeon Silver	PCI Express x16 slots	1
Processor generation	Intel Xeon Scalable 4th Gen	PCI Express x8 (Gen 5.x) slots	2
Processor model *	4514Y	Design	
Processor frequency *	2 GHz	Chassis type *	Rack (2U)
Processor boost frequency	3.4 GHz	Product colour	Black
Processor cores	16	Performance	
Processor cache	30 MB	Remote administration	iDRAC9 Enterprise 15G
Motherboard chipset	Intel C741	Software	
Number of processors installed	1	Operating system installed *	✗
Thermal Design Power (TDP)	150 W	Compatible operating systems * Canonical Ubuntu Server LTS Microsoft Windows Server with Hyper-V Red Hat Enterprise Linux SUSE Linux Enterprise Server VMware vSAN/ESXi	
System bus rate	16 GT/s		
Processor threads	32	Power	
Memory types supported by processor	DDR5-SDRAM	Redundant power supply (RPS) support *	✓
Memory		Power supply *	1400 W
Internal memory *	16 GB	Number of redundant power supplies supported	2
Internal memory type *	DDR5-SDRAM	Number of redundant power supplies installed	2
Buffered memory type	Registered (buffered)	Operational conditions	
Memory ranking	1	Storage temperature (T-T)	-40 - 65 °C
Memory slots	16x DIMM	Storage relative humidity (H-H)	5 - 95%
Memory data transfer rate	5600 MT/s	Operating altitude	0 - 3048 m
Maximum internal memory *	1.5 TB	Non-operating altitude	0 - 12000 m
Storage			
Total storage capacity *	2 TB		
Number of HDDs installed	1		
HDD capacity	2 TB		

Storage		Carbon footprint	
HDD interface	SATA III	Total carbon footprint (kg of CO2e)	8790
HDD speed	7200 RPM	Total carbon emissions, standard deviation (kg of CO2e)	4760
HDD size	3.5"	Carbon emissions, manufacturing (kg of CO2e)	1018
Number of HDDs supported	8	Carbon emissions, logistics (kg of CO2e)	162
Supported HDD sizes	3.5"	Carbon emissions, energy usage (kg of CO2e)	7580
RAID support *	✓	Carbon emissions, end-of-life (kg of CO2e)	26
Supported RAID controllers	PERC H755 with front load bracket	Total carbon emissions, w/o use phase (kg of CO2e)	1206
Hot-Plug support	✓	PAIA version	1.3.2, 2022
Optical drive type *	✗	Weight & dimensions	
Internal drive bays	8	Width	482 mm
Supported storage drive interfaces	SAS, Serial ATA	Height	86.8 mm
Drive writes per day (DWPD)	1	Packaging content	
Storage drive adapter included	✓	Packaging content	Riser Config 2, Half Length, Low Profile, 1x16 + 1x8 + 2x8 (Gen5)
Storage drive adapter type	2.5" - 3.5"	Technical details	
Network		Supported storage drives form factor (rear)	3.5"
LAN controller	Broadcom 5720	Other features	
Ethernet LAN	✓	Data transfer rate	6 Gbit/s
Cabling technology	10/100/1000Base-T(X)	Bytes per sector	512n
Ethernet interface type	Gigabit Ethernet	Open Compute Project (OCP)	NIC 3.0
Ports & interfaces			
Ethernet LAN (RJ-45) ports *	2		
USB 2.0 ports quantity	2		
USB 3.2 Gen 1 (3.1 Gen 1) Type-A ports quantity	1		
VGA (D-Sub) ports quantity	2		
Power cables quantity	2		

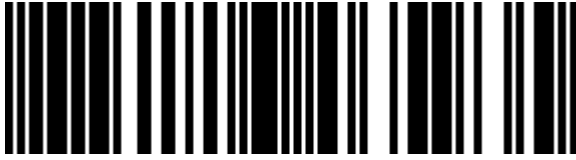

0884116465935



884116465935

Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.