



DELL PowerEdge R760XS servidor 2 TB Bastidor (2U) Intel® Xeon® Gold 5418Y 2 GHz 16 GB DDR5-SDRAM 1400 W

Marca : DELL

Familia de productos:
PowerEdge

Código del producto: R760XS-
FY26Q1G-MX



Nombre del producto :
R760XS

- No OS
- Intel Xeon Gold 5418Y (45MB Cache, 2GHz)
- 16GB DDR5-SDRAM & 2000GB HDD
- iDRAC9, Enterprise 16G

Intel Xeon Gold 5418Y (45MB Cache, 2GHz), 16GB DDR5-SDRAM, 2000GB HDD, LAN (Broadcom 5720), PERC H755, iDRAC9, Enterprise 16G, 2 x 1400W, No OS

DELL PowerEdge R760XS servidor 2 TB Bastidor (2U) Intel® Xeon® Gold 5418Y 2 GHz 16 GB DDR5-SDRAM 1400 W:




La combinación perfecta de cumplimiento y densidad

Ejecute las aplicaciones de TI más populares con facilidad gracias a la computación equilibrada y el almacenamiento flexible de este servidor refrigerado por aire.

DELL PowerEdge R760XS. Familia de procesador: Intel® Xeon® Gold, Frecuencia del procesador: 2 GHz, Modelo del procesador: 5418Y. Memoria interna: 16 GB, Tipo de memoria interna: DDR5-SDRAM. Capacidad total de almacenaje: 2 TB, Tamaño del HDD: 3.5", Interfaz del HDD: SATA III. Ethernet, Tecnología de cableado: 10/100/1000Base-T(X). Fuente de alimentación: 1400 W, Suministro de energía redundante (RPS), soporte. Tipo de chasis: Bastidor (2U)

Processor		Expansion slots	
Processor manufacturer *	Intel	PCI Express x8 slots	3
Processor family *	Intel® Xeon® Gold	PCI Express x16 slots	1
Processor generation	Intel Xeon Scalable 4th Gen	Design	
Processor model *	5418Y	Chassis type *	Rack (2U)
Processor frequency *	2 GHz	Product colour	Black
Processor boost frequency	3.8 GHz	Performance	
Processor cores	24	Remote administration	iDRAC9, Enterprise 16G
Processor cache	45 MB	Software	
Motherboard chipset	Intel C741	Operating system installed *	✗
Number of processors installed	1	Compatible operating systems * Canonical Ubuntu Server LTS Microsoft Windows Server with Hyper-V Red Hat Enterprise Linux SUSE Linux Enterprise Server VMware vSAN/ESXi	
Thermal Design Power (TDP)	185 W		
System bus rate	16 GT/s	Power	
Processor threads	48	Redundant power supply (RPS) support *	✓
Memory types supported by processor	DDR5-SDRAM	Power supply *	1400 W
Memory		Number of redundant power supplies supported	2
Internal memory *	16 GB	Number of redundant power supplies installed	2
Internal memory type *	DDR5-SDRAM	Power cable connector 1	NEMA 5-15P
Buffered memory type	Registered (buffered)	Power cable connector 2	C13 coupler
Memory ranking	1	Operational conditions	
Memory slots	16x DIMM	Storage temperature (T-T)	-40 - 65 °C
Memory data transfer rate	4800 MT/s	Storage relative humidity (H-H)	5 - 95%
Maximum internal memory *	1 TB	Operating altitude	0 - 3048 m
Storage			
Total storage capacity *	2 TB		
Number of HDDs installed	1		
HDD capacity	2 TB		

Storage		Operational conditions	
HDD interface	SATA III	Non-operating altitude	0 - 12000 m
HDD speed	7200 RPM	Carbon footprint	
HDD size	3.5"	Total carbon footprint (kg of CO2e)	6654
Number of HDDs supported	12	Total carbon emissions, standard deviation (kg of CO2e)	3747
Supported HDD sizes	3.5"	Carbon emissions, manufacturing (kg of CO2e)	466
RAID support *	✓	Carbon emissions, logistics (kg of CO2e)	133
Supported RAID controllers	PERC H755	Carbon emissions, energy usage (kg of CO2e)	6055
Hot-Plug support	✓	Total carbon emissions, w/o use phase (kg of CO2e)	599
Optical drive type *	✗	PAIA version	1.3.2, 2022
Network		Weight & dimensions	
LAN controller	Broadcom 5720	Width	482 mm
Ethernet LAN	✓	Height	86.8 mm
Cabling technology	10/100/1000Base-T(X)	Packaging content	
Ethernet interface type	Gigabit Ethernet	Packaging content	Riser Config 2, Half Length, Low Profile, 1x16 + 1x8 + 2x8(Gen5)
Ports & interfaces		Other features	
Ethernet LAN (RJ-45) ports *	2	Data transfer rate	6 Gbit/s
USB 2.0 ports quantity	2	Bytes per sector	512n
USB 3.2 Gen 1 (3.1 Gen 1) Type-A ports quantity	1	Open Compute Project (OCP)	NIC 3.0
VGA (D-Sub) ports quantity	2		
Power cables quantity	2		

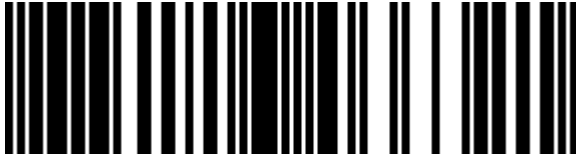

0884116466321



884116466321

Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.

Publication date: 14-APR-2025. Prints or copies of Information are only valid on the printed Publication date