



DELL PowerEdge R660XS servidor 2 TB Bastidor (1U) Intel® Xeon Silver 4510 2.4 GHz 16 GB DDR5-SDRAM 1400 W

Marca : DELL

Familia de productos:
PowerEdge

Código del producto: R660XS-
FY26Q1-MX



Nombre del producto :
R660XS

- No OS
- Intel Xeon Silver 4510 (30MB Cache, 2.4GHz)
- 16GB DDR5-SDRAM & 2000GB HDD
- iDRAC9 Enterprise 15G

Intel Xeon Silver 4510 (30MB Cache, 2.4GHz), 16GB DDR5-SDRAM, 2000GB HDD, LAN (Broadcom 5720), PERC H755, iDRAC9 Enterprise 15G, 2 x 1400W, No OS

DELL PowerEdge R660XS servidor 2 TB Bastidor (1U) Intel® Xeon Silver 4510 2.4 GHz 16 GB DDR5-SDRAM 1400 W:



Servidor en rack PowerEdge R660xs


La mezcla perfecta entre rendimiento y densidad

Ejecute fácilmente las aplicaciones de TI más populares con este servidor refrigerado por aire que es la mejor opción para una computación equilibrada y densa.

DELL PowerEdge R660XS. Familia de procesador: Intel® Xeon Silver, Frecuencia del procesador: 2.4 GHz, Modelo del procesador: 4510. Memoria interna: 16 GB, Tipo de memoria interna: DDR5-SDRAM. Capacidad total de almacenaje: 2 TB, Tamaño del HDD: 3.5", Interfaz del HDD: SATA III. Ethernet, Tecnología de cableado: 10/100/1000Base-T(X). Fuente de alimentación: 1400 W, Suministro de energía redundante (RPS), soporte. Tipo de chasis: Bastidor (1U)

Processor		Expansion slots	
Processor manufacturer *	Intel	PCI Express x16 (Gen 4.x) slots	1
Processor family *	Intel Xeon Silver	Design	
Processor generation	Intel Xeon Scalable 4th Gen	Chassis type *	Rack (1U)
Processor model *	4510	Product colour	Black
Processor frequency *	2.4 GHz	Rack rails	✓
Processor boost frequency	4.1 GHz	Performance	
Processor cores	12	Remote administration	iDRAC9 Enterprise 15G
Processor cache	30 MB	Trusted Platform Module (TPM)	✓
Motherboard chipset	Intel C741	Trusted Platform Module (TPM) version	2.0
Number of processors installed	1	Software	
Thermal Design Power (TDP)	150 W	Operating system installed *	✗
System bus rate	16 GT/s	Compatible operating systems *	
Processor threads	24	Microsoft Windows Server with Hyper-V Red Hat Enterprise Linux SUSE Linux Enterprise Server. VMware ESXi Canonical Ubuntu Server LTS	
Memory types supported by processor	DDR5-SDRAM	Power	
Memory clock speeds supported by processor	4400 MHz	Redundant power supply (RPS) support *	✓
Memory		Power supply *	1400 W
Internal memory *	16 GB	Number of redundant power supplies supported	2
Internal memory type *	DDR5-SDRAM	Number of redundant power supplies installed	2
Buffered memory type	Registered (buffered)	Operational conditions	
Memory ranking	1	Operating temperature (T-T)	10 - 35 °C
Memory slots	16x DIMM	Storage temperature (T-T)	-40 - 65 °C
Memory data transfer rate	5600 MT/s		
Maximum internal memory *	1.5 TB		
Storage			
Total storage capacity *	2 TB		
Number of HDDs installed	1		
HDD capacity	2 TB		

Storage		Operational conditions	
HDD interface	SATA III	Storage relative humidity (H-H)	5 - 95%
HDD speed	7200 RPM	Operating altitude	0 - 3048 m
HDD size	3.5"	Non-operating altitude	0 - 12000 m
RAID support *	✓	Carbon footprint	
Supported RAID controllers	PERC H755	Total carbon footprint (kg of CO2e)	8260
Hot-Plug support	✓	Total carbon emissions, standard deviation (kg of CO2e)	4440
Optical drive type *	✗	Carbon emissions, manufacturing (kg of CO2e)	1001
Internal drive bays	4	Carbon emissions, logistics (kg of CO2e)	138
Supported storage drive interfaces	SAS, Serial ATA	Carbon emissions, energy usage (kg of CO2e)	7100
Drive writes per day (DWPD)	1	Carbon emissions, end-of-life (kg of CO2e)	22
Network		Total carbon emissions, w/o use phase (kg of CO2e)	1160
LAN controller	Broadcom 5720	PAIA version	1.3.2, 2022
Ethernet LAN	✓	Weight & dimensions	
Cabling technology	10/100/1000Base-T(X)	Width	482 mm
Ethernet interface type	Gigabit Ethernet	Height	42.8 mm
Ports & interfaces		Packaging content	
Ethernet LAN (RJ-45) ports *	4	Packaging content	Riser Config 3
USB 2.0 ports quantity	2	Other features	
USB 3.2 Gen 1 (3.1 Gen 1) Type-A ports quantity	1	Bytes per sector	512n
VGA (D-Sub) ports quantity	2	Open Compute Project (OCP)	NIC 3.0

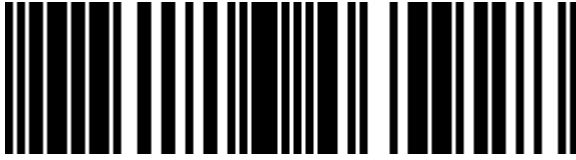

0884116465928



884116465928

Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.

Publication date: 14-APR-2025. Prints or copies of Information are only valid on the printed Publication date