APC

APC Back-UPS Pro sistema de alimentación ininterrumpida (UPS) Línea interactiva 0.55 kVA 330 W 6 salidas AC

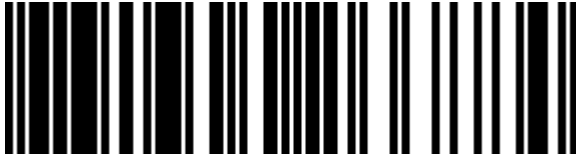**Marca :** APC

Código del producto: BR550GI

Nombre del producto : Back-UPS Pro

Back-UPS RS - 500VA, 330W, 230V, 355J
APC Back-UPS Pro. Topología UPS: Línea interactiva, Capacidad de potencia de salida (VA): 0.55 kVA, Potencia de salida: 330 W. Tipo de salida AC: Acoplador C13, Conector: Acoplador C14, Cantidad de salidas AC: 6 salidas AC. Tecnología de batería: Sealed Lead Acid (VRLA), Capacidad de la batería: 66 VAh, Tiempo típico de respaldo a carga completa: 3.2 min. Color del producto: Negro, Longitud de cable: 1.83 m, Tipo de visualizador: LCD. Certificados de cumplimiento: RoHS, Certificación: A-tick, C-tick, CE, GOST, GS Mark, REACH, PEP, EOLI

Features

UPS topology *	Line-Interactive
Output power capacity *	0.55 kVA
Output power *	330 W
Waveform *	Sine
Input operation voltage (min) *	155 V
Input operation voltage (max) *	290 V
Input frequency *	50/60 Hz
Automatic Voltage Regulation (AVR)	✔
Maximum current	6 A
Surge energy rating	420 J
Hold time (min)	6 ms
Hold time (max)	10 ms
Efficiency	98.2%
Noise level	45 dB
Surge protection	✔
Surge protection features	Network
Audible alarm(s)	✔
Audible alarm modes	Low battery alarm, Overload alarm

Ports & interfaces

AC outlet types	C13 coupler
Power plug	C14 coupler
AC outlets quantity	6 AC outlet(s)
Number of output IEC jumpers	2

Battery

Replacement battery cartridge	APCRBC110

Design

Cable length	1.83 m
Product colour *	Black
Display type	LCD

Operational conditions

Operating temperature (T-T)	0 - 40 °C
Storage temperature (T-T)	-15 - 45 °C
Operating relative humidity (H-H)	0 - 95%
Storage relative humidity (H-H)	0 - 95%
Operating altitude	0 - 3000 m
Non-operating altitude	0 - 15000 m

Certificates

Compliance certificates	RoHS
Certification	A-tick, C-tick, CE, GOST, GS Mark, REACH, PEP, EOLI

Packaging content

Cables included	USB cable
Manual	✔

Weight & dimensions

Width	91 mm
Depth	310 mm

Ports & interfaces

USB port	✔

Battery

Battery technology	Sealed Lead Acid (VRLA)
Battery capacity	66 VAh
Typical backup time at full load	3.2 min
Typical backup time at half load	11.8 min
Battery life (max)	5 year(s)
Battery recharge time	12 h
Hot-swap battery	✔
Automatic battery test	✔
Cold start	✔

Weight & dimensions

Height	190 mm
Weight	6.53 kg

Packaging data

Warranty card	✔
Software CD	✔
Bundled software	PowerChute Personal Edition
Package width	138 mm
Package depth	442 mm
Package height	252 mm
Package weight	7.71 kg

Logistics data

Products per pallet	48 pc(s)
Products per master (outer) case	2 pc(s)

Other features

Nominal output voltage	230 V
Nominal input voltage	230 V

0731304266884

731304266884