



DELL PowerEdge T360 servidor 2 TB Torre (4.5U) Intel Xeon E E-2478 2.8 GHz 16 GB DDR5-SDRAM 600 W

Marca : DELL

Familia de productos:
PowerEdge

Código del producto: T360-
FY26Q1-MX

Nombre del producto : T360

- No OS
- Intel Xeon E-2478 (24MB Cache, 2.8GHz)
- 16GB DDR5-SDRAM & 2000GB HDD
- iDRAC9, Enterprise 16G
Intel Xeon E-2478 (24MB Cache, 2.8GHz), 16GB DDR5-SDRAM, 2000GB HDD, LAN (Broadcom 5720), PERC H755 Adapter Full Height, iDRAC9, Enterprise 16G, 2 x 600W, No OS

DELL PowerEdge T360 servidor 2 TB Torre (4.5U) Intel Xeon E E-2478 2.8 GHz 16 GB DDR5-SDRAM 600 W:

Rendimiento de procesamiento, compatibilidad con GPU


El PowerEdge T360 de 4.5U y 1 conector es un factor de forma especialmente diseñado para los clientes que desean versatilidad, asequibilidad y poder de procesamiento.

DELL PowerEdge T360. Familia de procesador: Intel Xeon E, Frecuencia del procesador: 2.8 GHz, Modelo del procesador: E-2478. Memoria interna: 16 GB, Tipo de memoria interna: DDR5-SDRAM. Capacidad total de almacenaje: 2 TB, Tamaño del HDD: 3.5", Interfaz del HDD: SATA III. Ethernet, Tecnología de cableado: 10/100/1000Base-T(X). Fuente de alimentación: 600 W, Suministro de energía redundante (RPS), soporte. Tipo de chasis: Torre (4.5U)



Processor		Expansion slots	
Processor manufacturer *	Intel	PCI Express x4 slots	2
Processor family *	Intel Xeon E	Design	
Processor model *	E-2478	Chassis type *	Tower (4.5U)
Processor frequency *	2.8 GHz	Product colour	Black
Processor boost frequency	5.2 GHz	Performance	
Performance cores	8	Remote administration	iDRAC9, Enterprise 16G
Processor cores	8	Software	
Processor cache	24 MB	Operating system installed *	✗
Number of processors installed	1	Compatible operating systems *	Canonical Ubuntu Server LTS Microsoft Windows Server with Hyper-V Red Hat Enterprise Linux SUSE Linux Enterprise Server VMware ESXi
Thermal Design Power (TDP)	80 W		
Processor threads	16	Power	
Memory types supported by processor	DDR5-SDRAM	Redundant power supply (RPS) support *	✓
Memory clock speeds supported by processor	4800 MHz	Power supply *	600 W
Memory		Number of redundant power supplies supported	2
Internal memory *	16 GB	Number of redundant power supplies installed	2
Internal memory type *	DDR5-SDRAM	Power cable connector 1	NEMA 5-15P
Buffered memory type	Unregistered (unbuffered)	Power cable connector 2	C13 coupler
Memory slots	4x DIMM	Operational conditions	
ECC	✓	Storage temperature (T-T)	-40 - 65 °C
Memory data transfer rate	5600 MT/s	Storage relative humidity (H-H)	5 - 95%
Maximum internal memory *	128 GB	Operating altitude	0 - 2048 m
Storage		Non-operating altitude	0 - 12000 m
Total storage capacity *	2 TB		
Number of HDDs installed	1		
HDD capacity	2 TB		
HDD interface	SATA III		

Storage		Carbon footprint	
HDD speed	7200 RPM	Total carbon footprint (kg of CO2e)	1409
HDD size	3.5"	Total carbon emissions, standard deviation (kg of CO2e)	1213
Number of HDDs supported	8	Carbon emissions, manufacturing (kg of CO2e)	296
Supported HDD sizes	3.5"	Carbon emissions, logistics (kg of CO2e)	155
RAID support *	✓	Carbon emissions, energy usage (kg of CO2e)	930
Supported RAID controllers	PERC H755 Adapter Full Height	Carbon emissions, end-of-life (kg of CO2e)	28
Hot-Plug support	✓	Total carbon emissions, w/o use phase (kg of CO2e)	479
Optical drive type *	✗	PAIA version	1.4.0, 2024
Network		Weight & dimensions	
LAN controller	Broadcom 5720	Width	175 mm
Ethernet LAN	✓	Depth	581.1 mm
Cabling technology	10/100/1000Base-T(X)	Height	369.5 mm
Ethernet interface type	Gigabit Ethernet	Other features	
Ports & interfaces		Data transfer rate	6 Gbit/s
Ethernet LAN (RJ-45) ports *	2	Bytes per sector	512n
USB 2.0 ports quantity	5		
USB 3.2 Gen 1 (3.1 Gen 1) Type-A ports quantity	2		
VGA (D-Sub) ports quantity	1		
Serial ports quantity	1		
Power cables quantity	2		

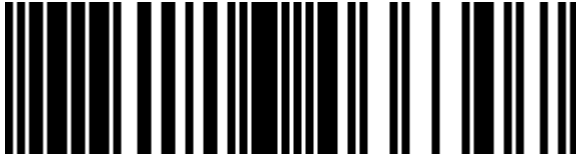

0884116466307



884116466307

Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.

Publication date: 08-APR-2025. Prints or copies of Information are only valid on the printed Publication date